

MGRP

BOITIERS DE RACCORDEMENT POLYESTER



IP 66, 67



The polyester terminal box range, MGRP, a IP 66, 67 protection degree, is available off the shelf in many different sizes. The MGRP range is well suited for indoor and outdoor environments thanks to its total corrosion resistance. Water and dust are prevented from entering the terminal box, thus eliminating the risk for component failure, and with that, unnecessary downtime.

Matériel: Polyester renforcé fibre de verre.

Joint: Livré de série avec un joint en polyuréthane. Des joints en silicone, néoprène et EPDM sont possibles sur demande.

Resistance à la température: -40 °C à +100 °C avec le joint en polyuréthane de série; -60 °C à +130 °C avec le joint en silicone; -35 °C à +100 °C avec le joint en EPDM; -30 °C à +80 °C avec le joint en néoprène M13.

Inflammabilité: UL94 V-0.


Protection: IP 66, 67.

Finition: RAL 7000.


Homologations: CE, GOST. Pour les homologations cULus_ UL Listed contacter notre service commercial.

Livraison: Corps de boîtier, couvercle et vis de couvercle en acier inox.

Front view

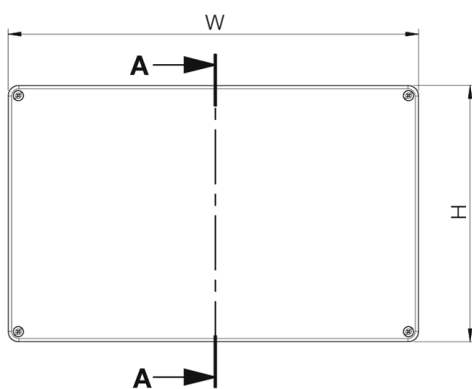


Sectional side view

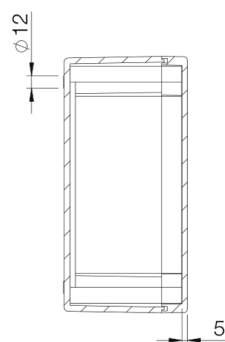

SECTION A-A

Inside box view

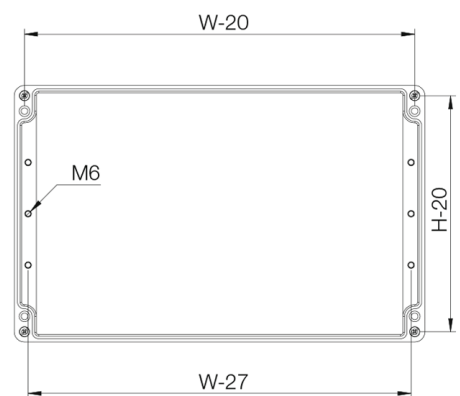

Top view



Dimensions du boîtier			
H	L	P	Référence
75	80	55	MGRP080806GE
75	80	75	MGRP080808GE
75	110	55	MGRP081106GE
75	110	75	MGRP081108GE
75	160	55	MGRP081606GE
75	160	75	MGRP081608GE
75	190	55	MGRP081906GE
75	190	75	MGRP081908GE
120	122	90	MGRP121209GE
120	220	90	MGRP122209GE
160	160	90	MGRP161609GE
160	260	90	MGRP162609GE
160	360	90	MGRP163609GE
160	560	90	MGRP165609GE
250	255	120	MGRP252612GE
250	400	120	MGRP254012GE
405	400	120	MGRP414012GE

MGRP

BOITIERS DE RACCORDEMENT POLYESTER
